
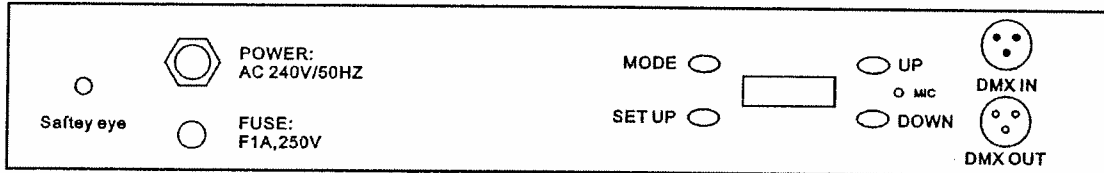


VIS065 Visage LED Block Flood


SPECIFICATION

1. Power in; 110V/240V 60HZ/50HZ
2. Power consumption: 90W
3. LEDES:24pcs Tri-LED - 6 segments
- 4: LED beam angle: 40degree
- 5: 2 x 8 character LCD Display
- 6: Selectable built-in programs, Auto running, DMX mode , slave mode, sound-activated.
Selectable 5. 8. 11.20 DMX channel for different applications

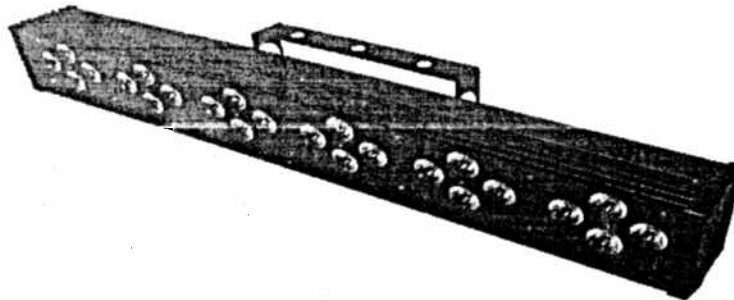

OPERATION

When the power is turned on, the LCD display will be as follows:



Press “MODE” button to activate the main menu: Built-in program, Auto run, DMX mode, Slave mode or Sound mode.

Built-in program-- running one of 14 built-in programs

Auto run—running built-in programs one after another in continuous loop.

DMX mode--controlled by DMX controller

Slave mode—units in this mode will be synchronized with the unit in master mode

Sound mode-- sound - activated

1. The Visage LED Block Flood has 14 different built in programs. Press “set up” and up/down buttons to select the programs (00-14) and select the desired program value (step time, flash).

02.SLOW D
S001 F012

For example,

Press "setup" button to move the cursor to select 02 and the desired Sp (step time) or Fs (flash speed)

Sp--step time value from 001-100

Fs--flash speed from 00-100

2. Auto run

Runs the 14 built in programs in a continuous loop - the frequency refers to the running times. and can be set up via the up/down buttons.

AUTO RUN
FQN:001

3. DMX mode

You can control the devices individually via your DMX-controller

1) Addressing

The control Board allows you to assign the DMX address which is defined as the first channel from which the Block Flood will respond. For address setting, press "set up" buttons until the display shows as follows:

DMX MODE
ADDR:001

Set the desired address via the up/down buttons

2) DMX-PROTOCOL


The control Board allows you to set 5. 8. 11.20 DMX channel for different applications. press "set up" button until the display is as follows:

DMX MODE
CH NO:20

Set the desired channels (5. 8. 11. 20) via the up/down buttons


① set 20 channels

the dimmer occupies the first channel when DMX value is smaller than 251, the flash occupies the second channel, each spot occupies 3 channels, six spots occupy 18 channels, and the projector occupy 20 channels.

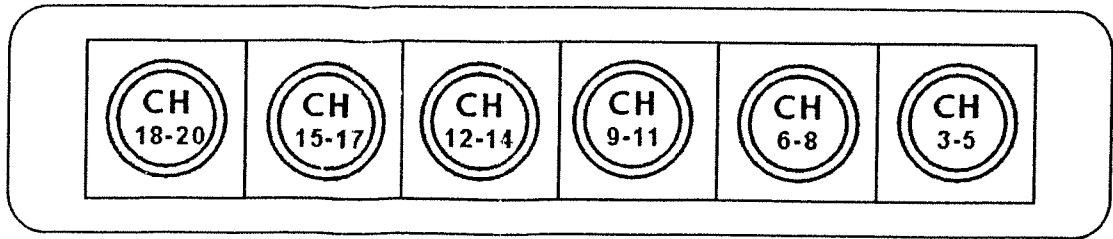


② Set 11 channels

The dimmer occupies the first channel when DMX value is smaller than 251, the flash occupies the second channel, every 2 spots occupy 3 channels, six spots occupy 9 channels, the projector occupies 11 channels

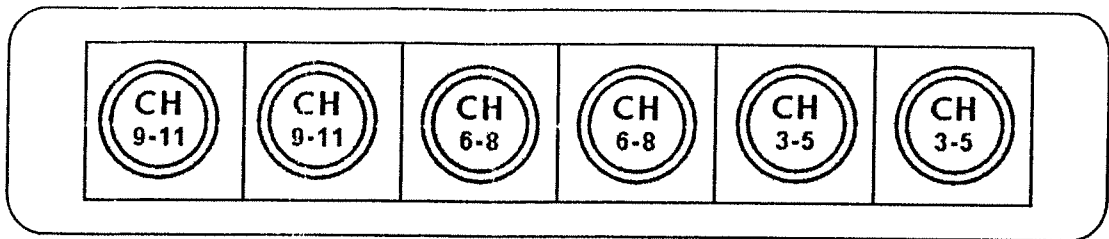


③ set 8 Channels

the dimmer occupies the first channel when DMX value is smaller than 251, the flash occupies the second channel, every three spots occupy 3 channels, six spots occupy 6 channels, the projector occupies 8 channels

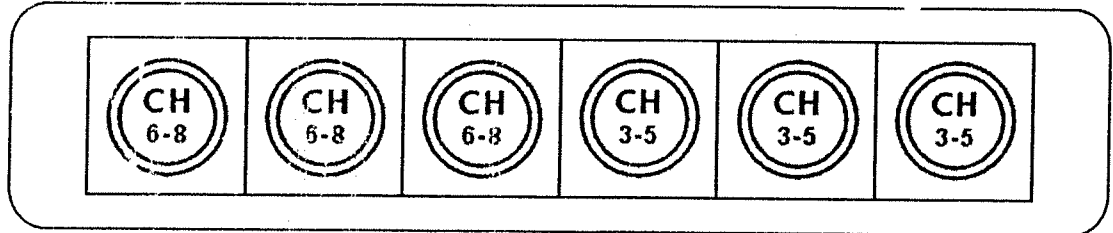

④ set 5 channels

The dimmer occupies the first channel when DMX value is smaller than 251, the flash occupies the second channel, six spots occupy the same 3 channels, the projector occupies 5 channels

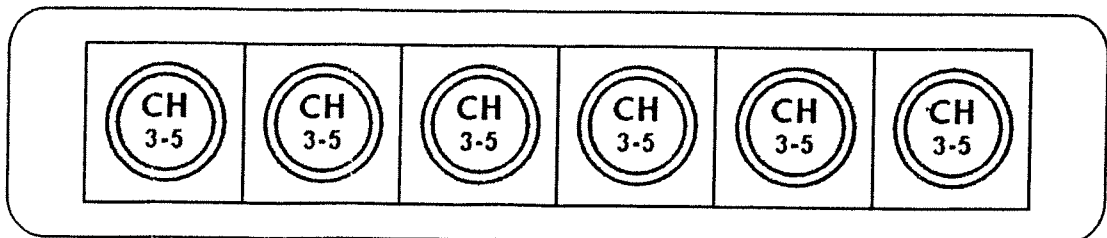

⑤ when during any one of the above three situations and the first channel DMX value is equal and more than 251 DMX protocol as follows

CH1	CH2			CH3	CH4	CH5	CH6	CH7	CH8
251-255	MODE	DMX VALUE	FUNCTION	NO USE	FLASH 0-255 (0-28HZ)	NO USE			
	1	0-10	BLACK OUT						
	2	11-21	RED						
	3	22-32	YELLOW						
	4	33-43	GREEN						
	5	44-54	CYAN						
	6	55-65	BLUE						
	7	66-76	PURPLE						
	8	77-87	WHITE						
	9	88-98	SLOW DREAM	Speed 0-255	FLASH 0-255 (0-28HZ)	NO USE	R 0-255	G 0-255	B 0-255
	10	99-109	FAST DREAM						
	11	110-120	COLOR FADE						
	12	121-131	COLOR CHANGE						
	13	132-142	FLOW1						
	14	143-153	FLOW2						
	15	154-164	FLOW3						
	16	165-175	FLOW4						
	17	176-186	DOUBLE FLOW1						
	18	187-197	DOUBLE FLOW 2						
	19	198--208	MULIT COLOR	Speed 0-255	FLASH 0-255 (0-28HZ)	COLOR SORT 0-255			
	20	209-219	2COLOR FLOW1						
	21	220-230	2COLOR FLOW2	Sensitivity 0-255 (32 grade)	NO USE	NO USE			
22	231-255	SOUND ACTIVE							

4. slave mode
5. sound mode

**SOUND
SENS:31**

Adjust the sound level by pressing 'up/down' button. The grade is 0-31.